


69/70

通用型线槽

Wiring duct



H (mm)	W (mm)	WDPK 系列 (A-Bmm)			WDPX 系列 (A-Bmm)		包装 (米 / 箱) Packing	
		型号 Part no.	6-8	8-10	10-10	型号 Part no.		4-6
	20					WDPX-3020	•	100
30	25					WDPX-3025	•	100
	35					WDPX-3035	•	100
35	35					WDPX-3535	•	100
	25	WDPK-4025	•			WDPX-4025	•	100
40	40	WDPK-4040	•			WDPX-4040	•	80
	60	WDPK-4060	•			WDPX-4060	•	64
	25	WDPK-5025	•			WDPX-5025	•	100
	35	WDPK-5035	•			WDPX-5035	•	100
50	*45	WDPK-5045	•			WDPX-5045	•	80
	50	WDPK-5050	•			WDPX-5050	•	80
	60	WDPK-5060	•			WDPX-5060	•	64
	80	WDPK-5080	•			WDPX-5080	•	48
	25	WDPK-6025		•		WDPX-6025	•	80
60	40	WDPK-6040		•		WDPX-6040	•	64
	60	WDPK-6060		•		WDPX-6060	•	48
	80	WDPK-6080		•		WDPX-6080	•	36
	33	WDPK-6533		•		WDPX-6533	•	80
65	45	WDPK-6545		•		WDPX-6545	•	80
	65	WDPK-6565		•		WDPX-6565	•	48
	25	WDPK-8025		•		WDPX-8025	•	60
	35	WDPK-8035		•		WDPX-8035	•	60
	40	WDPK-8040		•		WDPX-8040	•	48
	45	WDPK-8045		•		WDPX-8045	•	48
80	50	WDPK-8050		•		WDPX-8050	•	48
	60	WDPK-8060		•		WDPX-8060	•	36
	80	WDPK-8080		•		WDPX-8080	•	36
	100	WDPK-80100		•		WDPX-80100	•	24
	120	WDPK-80120		•		WDPX-80120	•	24
	35	WDPK-10035		•		WDPX-10035	•	48
	40	WDPK-10040		•		WDPX-10040	•	48
	50	WDPK-10050		•		WDPX-10050	•	48
100	60	WDPK-10060		•		WDPX-10060	•	36
	80	WDPK-10080		•		WDPX-10080	•	24
	100	WDPK-100100		•		WDPX-100100	•	24
	120	WDPK-100120		•		WDPX-100120	•	24
130	100	WDPK-130100		•				12
150	100	WDPK-150100		•				12

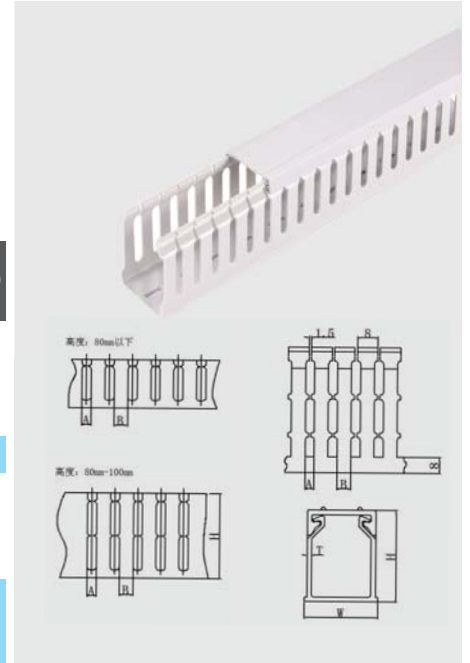

材质：采用低烟无卤环保硬质 PVC

Material: Low smoke, halogen free, rigid PVC

颜色：灰色（白色、蓝色、黑色等可特殊定制）

Colour: Grey (White, Blue and Black colors are available)

温度：-20°C~+70°C

Temperature range: -20°C~+70°C

阻燃等级：UL94-V0

Flame-retardant: UL94-V0

特性：反扣式槽盖与槽体设计合理，组合后绝不脱落，且接合面平滑，不易割伤手及擦损配线。配线槽 70 度内不易断裂、变形、变色、装配省时便利。出线孔低，组合容易，拆卸简单，易于配线。

Properties: Reasonable design in cover and body makes the duct durable, smooth connection protects hands and wires. Duct can keep its original state in 70° degree. Complete accessibility and easiest method of inserting or removing wires. It is easy to install and remove.